



May 12, 2026

Core Construction

7150 Cascade Valley Ct
Las Vegas, NV 89128

Attention: **Dawn Duranleau**
Phone: 702-926-1812
Email: dawn@coreconstruction.com
Project: NCSD Tonopah Sports Complex – Tonopah, NV

NRC is pleased to provide you with this proposal based upon the plans submitted by KNIT; Sheet A10-10
Dated 4.20.26 & Clarifications 1 & 2.

2026 NYE COUNTY PREVAILING WAGE W/ ZONE RATES

BID PACKAGES 66 (FLUID APPLIED FLOORING) & 67 (CONCRETE FINISHING “SEALED CONCRETE”)

Bid Package 66 DUR-A-CHIP Scope of Work: based upon 1,582 sq ft w/ 464 lf of 6” integral cove base

- Mask walls; Protect adjacent finishes as seen as needed by NRC.
- Diamond grind existing concrete substrate to prep for new coatings system.
- Layout and install 6” integral cove base 514 lf with standard radius.
- Patch minor cracks and/or divot and joints with epoxy patch materials, flush.
- Apply one (1) coat of SWP/Dur-A-Flex WB Glaze Primer at approx. 8 mils.
- Apply one (1) coat of SWP/Dur-A-Flex Glaze at approx. 8 mils. with flake broadcast to rejection, single standard blend macro chips – scarlet blend.
- Sweep and scrape excess flakes and vacuum clean.
- Apply one (1) coat of SWP/Dur-A-Flex Glaze at approx. 10 mils. with flake broadcast to rejection, single standard blend macro chips – scarlet blend.
- Sweep and scrape excess flakes and vacuum clean.
- Apply one (1) coat of SWP/Dur-A-Flex Glaze at approx. 10 mils as grout coat.
- Apply one (1) coat of SWP/Dur-A-Flex AT at manufacturers recommendation satin or gloss with or without grit.
- Clean up all NRC construction debris.

Lump Sum Base Bid.....\$87,525.00

Alternate Deduct #1: Credit if room 102 (storage 258 sq ft) is sealed concrete in lieu of fluid applied flooring, DEDUCT.....<-14,274.00>

Bid Package 67 CONCRETE FINISHING – SEALED CONC. Scope of Work: based upon 843 sq ft

- Mask walls; Protect adjacent finishes as seen as needed by NRC.
- Clean out existing control joints and fill with single standard color polyurea joint filler flush with backer rod.
- Clean existing concrete substrate to prep for new sealer.
- Patch minor cracks and/or divot and joints cementitious patch materials, flush.
- Apply two coats of SpecChem WB cure and seal.
- Clean up all NRC construction debris.

Lump Sum Base Bid.....\$10,397.00

Alternate Add #1: To apply concrete sealer to room 102 storage on 258 sq ft, ADD...\$3,182.00

**INCLUSIONS:**

1. Labor
2. Materials
3. Equipment
4. Supervision

EXCLUSIONS:

1. Repairs to existing substrate.
2. Removal of any contaminants.
3. Water, sufficient overhead lighting, and power.
4. Bonds, permits and fees.
5. More than 2 mobilizations.
6. Floor Protection.

STANDARD CLARIFICATIONS:

1. Concrete to be free of cures, retardants, or sealers, and to be a smooth hard troweled finish for polish and staining and a light broom finish for coatings. Floors should be protected prior to our arrival. Any stripping or clean-up required prior to the start of work, due to negligence of other trades (i.e. paint, drywall mud, etc) will be billed on a Time & Material basis, or through a signed Change Order.
2. All areas are to be provided to NRC at the start of the job, in a clean, broom swept condition, scraped down and free of contaminants.
3. Condition of the substrate is the responsibility of the General Contractor or Owner.
4. Pricing is predicated on design, scope of work, quantities, and square footage, as well as consecutive workdays, uninterrupted by other trades.
5. Repairs to existing cracks and/or imperfections in existing substrate prior to the application of coatings or topping is to help prevent such imperfections from showing through new finished flooring, however NRC cannot warranty or guarantee that such cracks and/or imperfections will not reflect through new finished flooring.
6. The application of chemically reactive stains, solvent and water-base dyes on concrete surfaces creates an irregular, mottled finish, which varies greatly (in some cases dramatically), from area to area. Chemical stains and, or dyes will produce a wide variegation of color and not a one-color, monochromatic, paint-like effect. Irregularity in surface color is naturally inherent with these materials and should be expected and desired.
7. Minimal space for storage of materials is to be provided by General Contractor or Owner.
8. Cracking and pinholes are inherent to our topping products and will in no way affect the structural integrity of the material.
9. Should concealed conditions be discovered, differing from those ordinarily encountered and generally recognized as inherent to the scope of work as identified in this proposal, the cost shall be adjusted through a signed Change Order or Time & Material arrangement.
10. The above listed quantities stated herein are the basis for this cost proposal. Any dramatic increase or decrease to the footage will result in a Change Order, increasing or decreasing the contract amount.
11. This project has been bid with fixed labor rates, and work is expected to occur during the regular "work week", Monday through Friday 6:00 am to 4:30 pm, excluding holidays (unless noted otherwise). Should the construction schedule require unusual work hours, weekend or overtime hours, those additional costs will need written authorization from the General Contractor or Owner.
12. Due to the liquid nature of the stains and, or dyes, sealers, coatings, desifiers & stain guards and it is recommended that our processes take place prior to any other finish material's installation, (i.e. specialty finishes, base trim, cabinetry and toe kicks, natural stone, carpet or wood). Some of the chemicals utilized in our processes contain acids and metallic salts, coatings materials are corrosive to some materials and damage may occur if direct contact is made with these finishes. We will exercise our due diligence in protecting these finishes, but we do not include extreme protective measures other than our normal plastic and masking, and NRC will not be responsible for any damage that may result.
13. This proposal excludes permit fees, bonding, traffic control, temporary utilities, (including climate control), moisture problems which may be inherent to the existing conditions.
14. NRC requires full and unobstructed access to the work area for our men and equipment from start to completion. If we are forced to clean up a work area in order to complete our scope of work above and beyond our contracted amount a change order will be issued. Client is to also provide full access to our work area including but not limited to forklifts, elevators, ramps, and assistance in ingress and egress. Any work associated with getting our men and equipment in and out of our designated work area in and above written authorization is subject to a change order.



15. Material and labor lead time may be as much as four to six weeks. All out-of-town work will require a two-week lead time for all travel and flight arrangements. If we do not receive this lead time and expedited freight and airfare are necessary, a Change Order will be issued to cover additional costs.
16. All graphic artwork should be provided in an AutoCAD, vectorized, line drawing format.
17. Any artwork, samples, and procedures generated or designed through NRC or our employees, is the property of NRC and cannot be used without written consent.
18. The overlay toppings and/or coatings used are not intended to correct existing problems that may be present in the substrate, (i.e. out of level, elevation problems, gaping structural cracks, efflorescence, moisture vapor emissions, moisture vapor transmission). Correcting these existing conditions will require change order.
19. The architectural topping, resurfacing, or other systems on this project may include a sacrificial, maintenance sealer or stain guard which is used to aid in the clean ability of the surface, as well as offer protection to the surface. Upon project completion, NRC will provide the GC &/or Owner with and Care & Maintenance manual, which will give instructions on the cleaning and maintaining of the flooring or any scope of work we perform. After project acceptance, NRC will not be responsible for damage due to improper or lack of maintenance, misuse, nor neglect.
20. The manufacturers of toppings, sealers, caulking products and grout, base their warranties on the American Concrete Institute's 28-day concrete curing period. We understand that this may not be conducive to fast-track construction schedules and, in most instances, we have not experienced problems within a 14-day cure period. If the Owner or Contractor wishes to circumvent the recommended 28-day cure, it will be at his/ her discretion. NRC will not take responsibility for any problems that may occur because of inadequate cure time.
21. Installation of toppings or coatings in adverse conditions such as low and high heat temperatures, high winds, humidity levels, high levels of moisture vapor, areas that have not been acclimated to manufactured required levels are not warranted by NRC.
22. Protection of vertical walls and adjoining surfaces has been estimated with plastic at a maximum of 48" high. If a greater height of protection is required, a change order will be necessary.
23. We will make every reasonable effort to protect areas and to contain the dust that may result from our placement, stamping, saw cutting, surface prep, polishing or decorative sand blasting, but we cannot accept responsibility for cleaning or dusting of surrounding areas due to ambient, airborne dust.
24. If samples have not been submitted or approved prior to this proposal, certain assumptions have been made with regards to standard methodologies. If, through the sampling process, unusual or excessive methodologies are required, we will need to consider the cost impact and issue a Change Order if necessary.
25. Our estimated costs in this proposal are based on the information and drawings provided. Should new construction drawings and specifications be provided that change our scope of work or an onsite inspection shows conditions differing from our original information a Change Order may be required.
26. Certain topping systems cannot accept point loads prior to a complete cure. Any carts or heavy equipment must have pneumatic tires. Check tires for foreign objects such as nails or screws prior to their placement on the finished floor. It is recommended that heavy objects, furniture, moving chairs, carts, etc. have felt pads or similar non-damaging protective devices affixed to the point of contact with the finished surfaces we provide. I.E. felt pads, non-marring plastic furniture leg attachments, moving heavy objects with heavy point loads with carts or other non-damaging means in lieu of dragging across finished surfaces without such methods. Any damages caused by these means or similar are not covered by our warranty.
27. Protection after our scope of work is recommended, but not always necessary. Floor protection is excluded from this proposal unless noted otherwise. Irregularities or damages caused by others during and after protection are not covered by our warranty and subject to a change order if requested to make repairs. Care needs to be taken, taking into consideration cure times, covering materials, adhesives used and a variety of other protective measures unique to the project we install or work on.
28. If water or solvent based dyes, as well as some chemically reactive stains and resinous systems are used in the coloration of this project, they may not be UV stable and may fade or experience a color shift when exposed to direct sunlight. The degree of fading depends on the color and the length and intensity of UV exposure. If UV is an issue we suggest chemical stains or water-based stains and urethane top coats which are UV stable.




29. Generally, the materials within the described scope of work require an ambient temperature of 60-85 degrees fahrenheit to be installed.
30. Areas of the building which open to the outside may cause excessive cracking of the topping products due to temperature change and or wind drying out the surface prematurely. We recommend these areas be closed off and sealed prior to our pour, otherwise NRC will not be responsible for any excessive cracking which may occur.
31. Power required for shot blasting, grinding and polishing is 480-volt, 3 phase with 50 amp service and 230-volt 3 phase and 1 phase with 50 amp service and is not included in this proposal, unless noted otherwise.
32. Due to the nature of the chemicals proposed to protect the floor trowel marks, streaks, roller hairs and/or airborne particulate may appear in the finish. This is inherent with these products and will in no way affect the structural integrity of the material.
33. Polished concrete flooring will not remove all existing stains in the concrete, they may be apparent in the finish. Polished concrete is susceptible to staining, especially if spills are left unattended, even for a short time. NRC is not responsible for removing existing stains or future stains nor can we warranty against staining that may occur.
34. Due to the grinding process used to polish concrete or prepare it for other finishes various degrees of aggregate to concrete cream levels will be apparent. The floor will not have a uniform appearance due the natural variations of concrete this should be expected and desired, not all coatings and/or sealers may be thick enough to cover any and/or all shot-blast lines or grinder marks.
35. Any and all warranties shall be void if coatings, toppings or concrete fail due to the presence of any type of treatment, penetrating sealer, contaminate, moisture, moisture vapor emission, moisture vapor transmission, alkali, efflorescence, substrate defects, misuse, abuse, or neglect and condition in the concrete such as ASR (alkali-silica reaction), AAR (alkali-aggregate reaction) and ACR (alkali-carbonate reaction).
36. Owner/Contractor agrees to indemnify, defend and hold harmless Subcontractor for any claims, liability, loss damage, cost, expense, including attorney's fees, awards, fines, or judgments, with respect to, or arising out of death or bodily injury to persons, injury to property, defects in workmanship or materials or design defects (if the design originated with Owner or Contractor or parties hired by either), or arising out of Owner or Contractor's alleged or actual neglect or omission, regardless whether such act or omission is active or passive. Owner or Contractor shall not be obligated to indemnify Subcontractor with respect to the sole active or passive negligence or willful misconduct of Subcontractor.
37. NRC is not responsible for any slips or falls that may occur on surfaces we work on.
38. Any and all work not described in this proposal is excluded.

Initial here to indicate you have read and understand ALL the above Standard Clarifications. Should you have any questions or concerns about the intent of these Standard Clarifications, please feel free to contact us. Please sign below to indicate your acceptance of this proposal and return the signed copy to us. Quotes are only valid for 30 days after the date of this proposal due to changing labor rates and raw material pricing.

Signature

Date

Thank you for considering NRC, we look forward to working with you on this project and future projects. If you have any questions or need further clarification, please give us a call and let us know what we can do to earn your business.

Sincerely,

Justin Barrett
 XbidCSI, LLC – for NRC
 Cell # 702.335.9538

Autodesk Docs//240041 - NCSD Tenant's Field Replacement/NCSD THS Sports Field Replacement.rvt

FINISH LEGEND

MARK	PRODUCT TYPE	MANUFACTURER	PRODUCT LINE	STYLE/SERIES	MODEL #	COLOR	FINISH	SIZE	REMARKS
DIVISION 03 - CONCRETE									
SC-1	SEALED CONCRETE					CLEAR	FINE BROOM FINISH		
DIVISION 06 - WOOD, PLASTIC, AND COMPOSITES									
FRP-1	FIBERGLASS REINFORCED PLASTIC PANEL	IMARLITE				P470N DARK GREY	PEBBLED	4' x 8'	CLASS C FIRE-RATED
FRP-2	FIBERGLASS REINFORCED PLASTIC PANEL	IMARLITE				P199 BRIGHT WHITE	PEBBLED	4' x 8'	CLASS A FIRE-RATED
DIVISION 07 - THERMAL AND MOISTURE PROTECTION									
PP-1	METAL PANEL - ROOF	MBGI		PBR		POLAR WHITE			STANDING SEAM METAL ROOF PANEL
DIVISION 09 - FINISHES									
ACT-1	ACOUSTICAL CEILING TILE	ARMSTRONG		DUNE SECOND LOOK II	2712	WHITE		24" x 48" x 3/4"	SQUARE LAY-IN 15/16" EDGE - PRELUDE XL 15/16" EXPOSED TEE (WHITE), PATTERN I
ACT-2	ACOUSTICAL CEILING TILE, CLEAN ROOM	ARMSTRONG		CLEAN ROOM VL	870	WHITE		24" x 48" x 5/8"	SQUARE LAY-IN 15/16" EDGE - PRELUDE XL 15/16" EXPOSED TEE (WHITE)
EP-1	EPOXY FLOORING	DURAFLEX	DUR-A-CHIP	MACRO CHIP		SCARLET			6" COVED BASE
EPT-2	EXTERIOR PAINT - ACCENT	SHERWIN-WILLIAMS				6866 HEARTHROB	GLOSS		
EPT-2	EXTERIOR PAINT - FIELD	SHERWIN-WILLIAMS				7005 PURE WHITE	GLOSS		
PT-1	INTERIOR PAINT - FIELD	SHERWIN-WILLIAMS				7012 CREAMY	EGG SHELL		
PT-2	INTERIOR PAINT - ACCENT	SHERWIN-WILLIAMS				6866 HEARTHROB	EGG SHELL		
PT-3	INTERIOR PAINT - CEILING	SHERWIN-WILLIAMS				7007 CEILING BRIGHT WHITE	FLAT		
RB-1	RUBBER BASE	HOPPE	CONTOURS SIMPLICITY		123	CHARCOAL		4" X 8" X 1/4"	
DIVISION 10 - SPECIALTIES									
TP-1	TOILET PARTITION	SCRANTON PRODUCTS	HINY HIDERS	METALLIC COLOR COLLECTION		STAINLESS	EX TEXTURE		

ROOM FINISH SCHEDULE

ROOM #	NAME	BASE	FLOOR	WALLS	CEILING	REMARKS
100	TEAM 2	RB-1	SC-1	PT-1	ACT-1	SEE FINISH PLAN FOR ACCENT WALL LOCATIONS
100A	R/R	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
101	TEAM 1	RB-1	SC-1	PT-1	ACT-1	SEE FINISH PLAN FOR ACCENT WALL LOCATIONS
101A	R/R	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
102	STORAGE	EP-1	EP-1	PT-1	OTS	
103	OFFICE	RB-1	SC-1	PT-1	ACT-1	SEE FINISH PLAN FOR ACCENT WALL LOCATIONS
104	I.T.	RB-1	SC-1	PT-1	OTS	
104A	UTILITY	RB-1	SC-1	PT-1	OTS	
105	STORAGE	EP-1	EP-1	PT-1	HRD1	
106	CONCESSIONS	EP-1	EP-1	PT-1	ACT-1	FRP-2 96" HIGH
107	STORAGE	EP-1	EP-1	PT-1	HRD1	
108	CUST.	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
109	FAMILY R/R	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
110	MENS	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
111	WOMENS	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
112	VESTIBULE	EP-1	EP-1	PT-1	HRD1	
112A	VESTIBULE	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH
112B	VESTIBULE	EP-1	EP-1	PT-1	HRD1	FRP-1 48" HIGH

FINISH NOTES

PROJECT NOTES


- PROVIDE MOISTURE RESISTANT GYP. BOARD AT ALL WALLS WITHIN 2' OF THE FRONT AND SIDES OF URINALS AND WATER CLOSETS.
- PROVIDE CEMENT OR FIBERGLASS-MAT GYP. BD. OR MOLD-RESISTANT GYP. BD. (E.G. DENSARMOR PLUS) AT ALL FRP WITHIN WET OR DAMP LOCATIONS.
- ALL GYPSUM BOARD WALL AND CEILING FINISHES TO BE LEVEL 3, SPATTER U. N. O.

PAINT NOTES

- FINISH GYPSUM BOARD IN ACCORDANCE WITH LEVELS DEFINED IN ASTM C840, AS FOLLOWS:
 - LEVEL 5: WALLS AND CEILINGS TO RECEIVE GLOSS PAINT FINISH AND OTHER AREAS SPECIFICALLY INDICATED.
 - LEVEL 4: WALLS AND CEILINGS TO RECEIVE PAINT FINISH OR WALL COVERINGS
 - LEVEL 3: WALLS TO RECEIVE TEXTURED WALL FINISH
 - LEVEL 2: IN UTILITY AREAS, BEHIND CABINETRY, AND ON BACKING BOARD TO RECEIVE TILE FINISH
 - LEVEL 1: WALL AREAS ABOVE FINISHED CEILINGS, WHETHER OR NOT ACCESSIBLE IN THE COMPLETED CONSTRUCTION
- PAINT SHEENS, UNLESS NOTED OTHERWISE, AS FOLLOWS:
 - FLAT: MPI GLOSS LEVEL 1 TO BE USED FOR CEILINGS AND OTHER OVERHEAD SURFACES
 - EGG SHELL: MPI GLOSS LEVEL 3 TO BE USED AT ALL GENERAL LOCATIONS
 - SEMI-GLOSS: MPI GLOSS LEVEL 5 TO BE USED AT TOILET ROOMS, MECHANICAL ROOMS, ELECTRICAL ROOMS, UTILITY ROOM, JANITOR ROOMS, RESTROOM VESTIBULE, AND SIMILAR HIGH ABUSE AREAS
 - DOORS AND DOOR TRIMS: MPI GLOSS LEVEL 5

TRANSITIONS / EDGES


RESILIENT ACCESSORIES

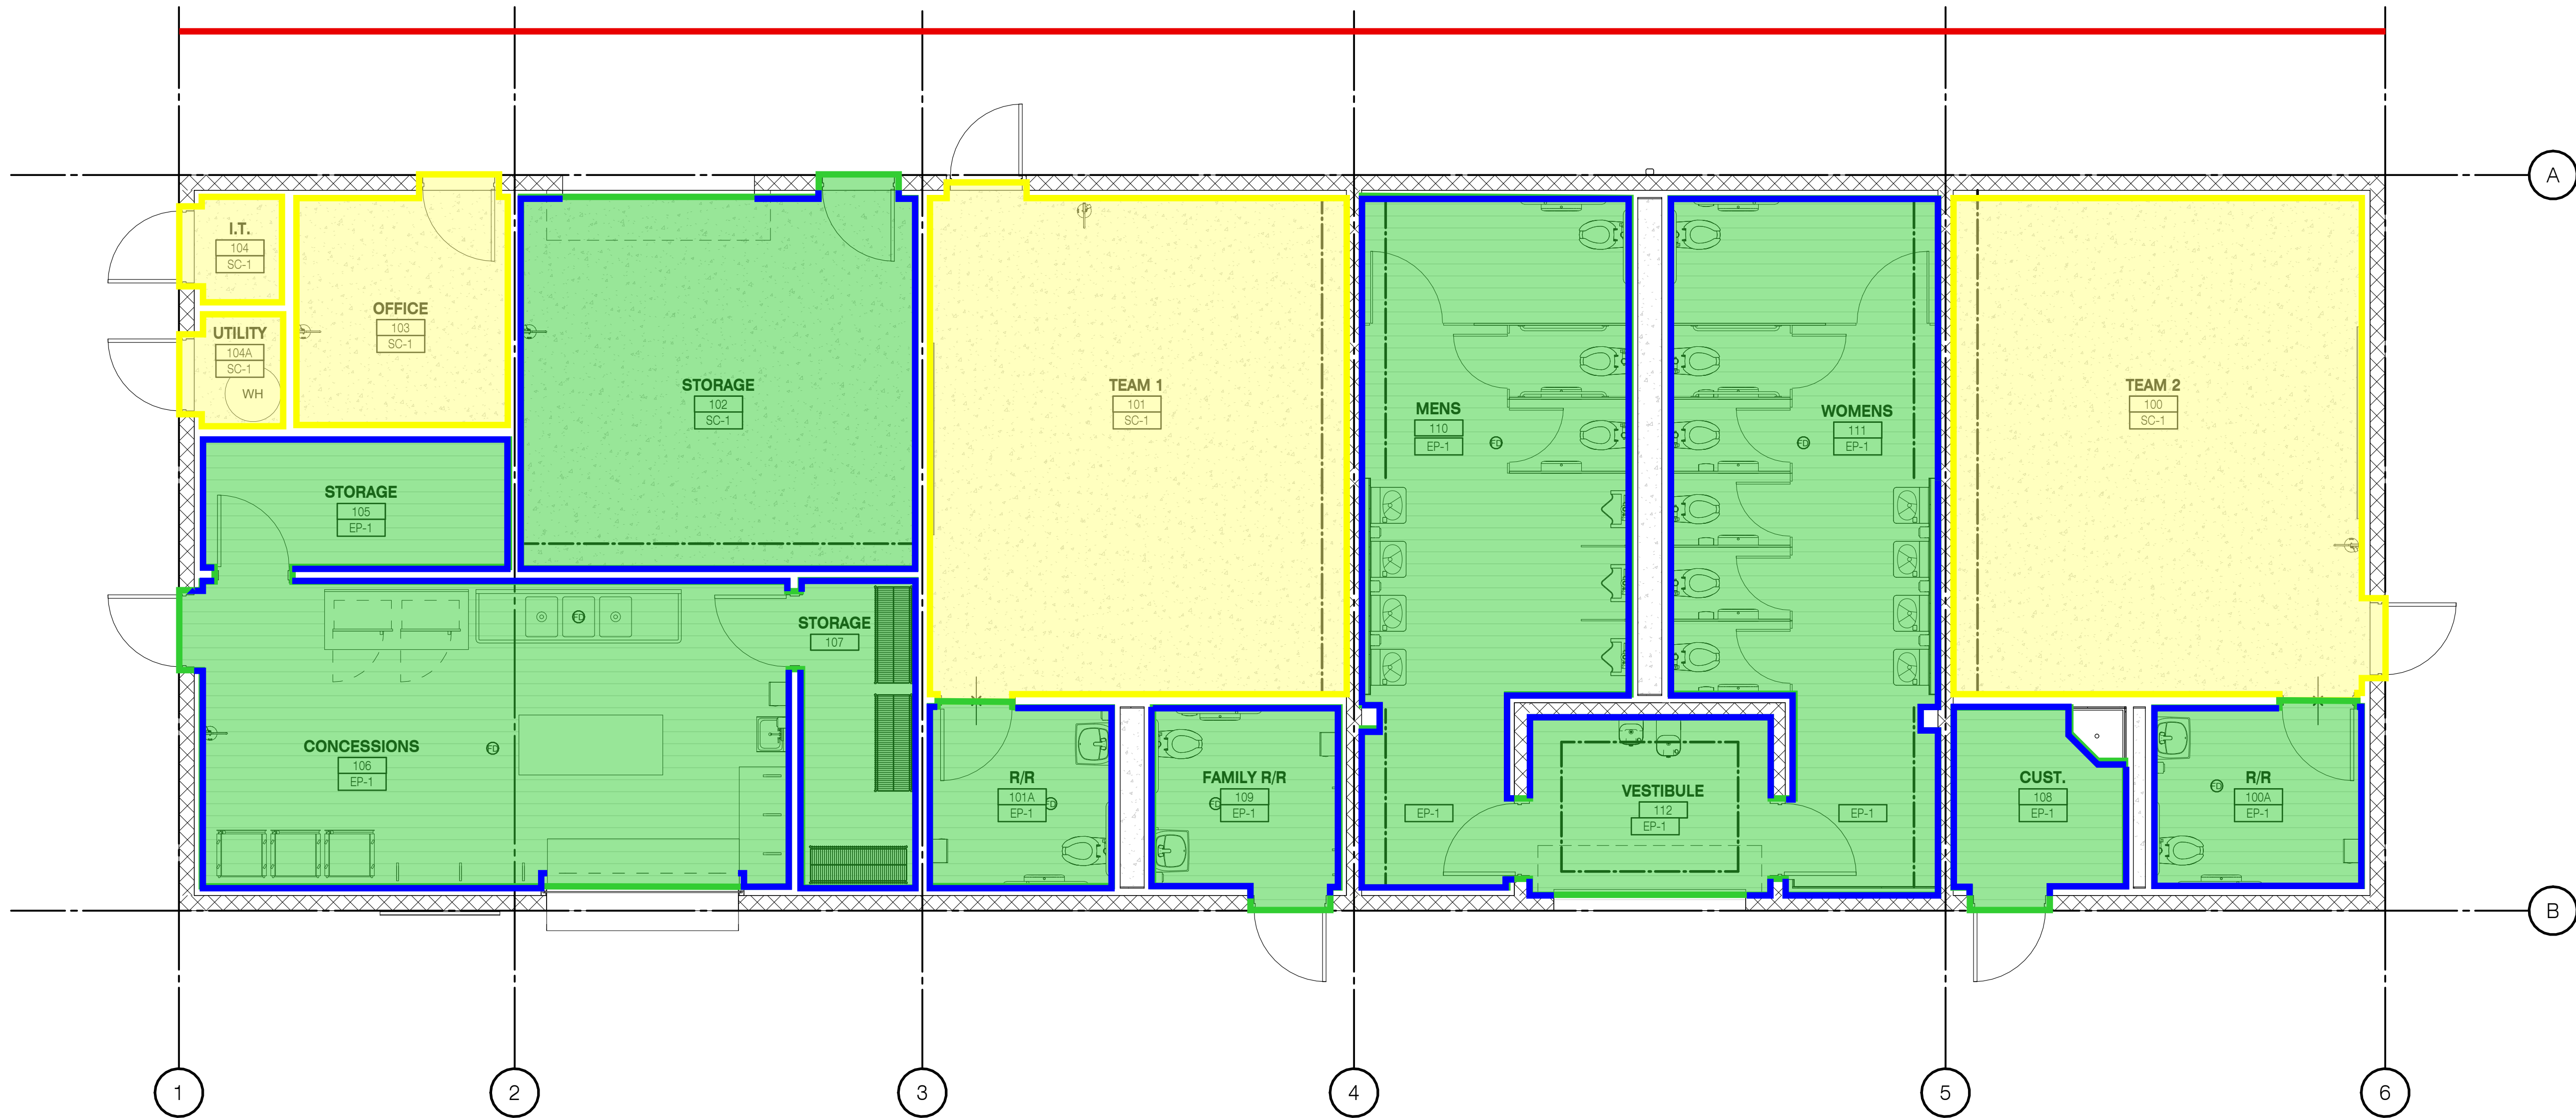
- 
(SEALED CONCRETE) (EPOXY)

NOTES:

- PROVIDE RESILIENT FLOORING ACCESSORIES AT FLOORING MATERIAL TRANSITIONS AND OPEN EDGES, COLOR TO MATCH RESILIENT FLOORING.
- PROVIDE SATIN ANODIZED ALUMINUM TILE ACCESSORIES AT FLOORING MATERIAL TRANSITIONS AND OPEN EDGES.

Legend





	CHECK SCALE	92.00 LF
	EP-1 EPOXY DUR-A-CHIP MACRO CHIP SCARLET	1,581.40 SF
	EP1 6" INTEGRAL COVE BASE	463.77 LF
	SC-1 SEALED CONCRETE	842.12 SF



SHEET NOTES

- ITEMS ON EXTERIOR BUILDING WALLS: ELECTRICAL CONDUIT, PIPING AND OTHER MISC. ITEMS ARE PAINTED TO MATCH ADJACENT SURFACE U.N.O.
- EXTERIOR HOLLOW METAL DOORS & FRAMES SHALL BE PAINTED ON THE INTERIOR SIDE PER THE DOOR SCHEDULE AND EXTERIOR SIDE PER THE EXTERIOR ELEVATION.

FINISH LEGEND

- | | | |
|---|------|-------------------|
|  | SC-1 | SEALED CONCRETE |
|  | EP-1 | EPOXY FLOORING |
|  | PT-2 | PAINT ACCENT |
|  | | FLOOR TRANSITION. |